

## EMC filters

3-line LCL filters

300/520 V, 50/60 Hz, 16 A ... 400 A, 50 °C

**Series/Type:** B84143G/Q\*R/S405


**Date:** May 2014

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

**3-line LCL filters for converters and power electronics**
**Rated voltage  $V_R$ : 300/520 V AC**
**Rated current  $I_R$ : 16 A to 400 A**
**Construction**

- 3-line LCL filter
- Open frame design

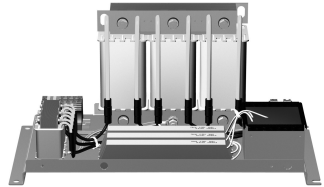
**Features**

- Power quality improvement for Active Infeed Converter (AIC)
- High attenuation of pulse frequency to the grid side
- Integrated damping resistors to suppress current oscillation
- Degree of protection<sup>1)</sup>: IP00  
IP20 (16 A ... 200 A) with optional cover B84143Q\*R405
- Modifications possible according customer specific requirements
- For natural convection
- Design complies with ENEC, UL and cUL

**Typical applications**

Active infeed converter for

- Elevators
- Test benches
- Centrifuges

**Terminals**

- Finger-safe terminal blocks (16 A, 66 A)
- Busbars for AIC reactors and line reactors (200 A, 400 A)

**Marking**



Marking on component:


Manufacturer's logo, ordering code, rated current, rated frequency, date code

Minimum data on packaging:

Manufacturer's logo, ordering code, quantity, date code

1) According to IEC 60529:2001

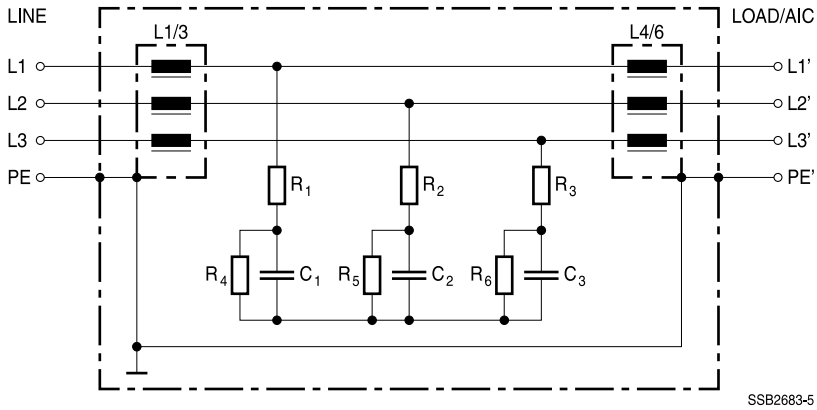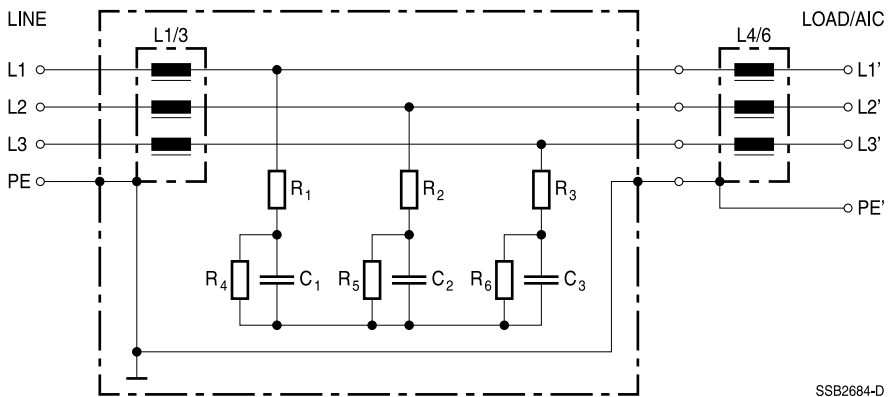**Typical circuit diagram B84143G0016R405 and B84143G0066R405**

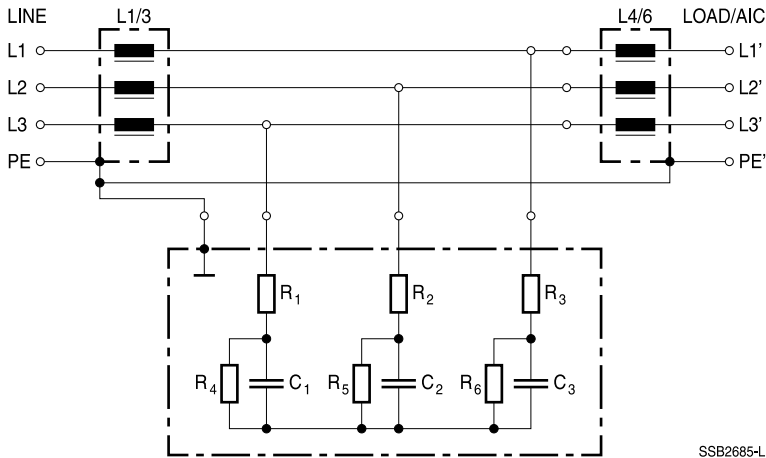**Typical circuit diagram B84143G0200R405**





**Typical circuit diagram B84143G0400S405**

**Technical data and measuring conditions**

Rated voltage $V_R$	300/520 V AC (50/60 Hz)
Rated current $I_R$	Referred to 50 °C rated temperature <sup>1)</sup>
Test voltage $V_{test}$	2240 V DC, 2 s (line/line) 2720 V DC, 2 s (lines/case)
Overload capability (thermal)	1.5 · $I_R$ for 3 min per hour 2.5 · $I_R$ for 30 s per hour
Active infeed converter (AIC) pulse frequency <sup>2)</sup>	7 kHz ... 16 kHz
Frequency converter pulse frequency <sup>2)</sup>	4 kHz ... 16 kHz
Motor frequency <sup>2)</sup>	0 Hz ... 100 Hz
Motor cable length <sup>2)</sup>	$\Sigma \leq 150$ m
Multi axes <sup>2)</sup>	$\leq 6$
Climatic category (IEC 60068-1)	25/100/21 (–25 °C/+100 °C/21 days damp heat test)

1) For use at higher ambient temperature as the rated temperature, see current derating in our actual data book. For floor mounting with cover (horizontal mounting position, see "Mounting") the ambient temperature shall be 40°C max.

2) Typical application. Deviations from above typical values shall be discussed with your field application experts from EPCOS.

**Characteristics and ordering codes**


$I_R$	Terminal cross section	$R_{typ}$	Approx. weight	Ordering code	Approvals <sup>3)</sup>		
A	mm <sup>2</sup>	mΩ	kg				
16	1.5-10	27	20	B84143G0016R405	D	D	D
66	2.5-35	7	43	B84143G0066R405	D	D	D
200	35-95 for capacitor module incl. line reactor	0.97	40	B84143G0200R405	D	D	D
	Busbar for AIC reactor	1.75	96	B84143G0200R405	D	D	D
400	1.5-16 for capacitor module	–	7	B84143G0400S405	D	D	D
	Busbar for AIC reactor	0.7	172	B84143G0400S405	D	D	D
	Busbar for line reactor	0.4	31	B84143G0400S405	D	D	D

<sup>3)</sup> X = Approval granted



P = Approval pending

D = Design complies with

– = None

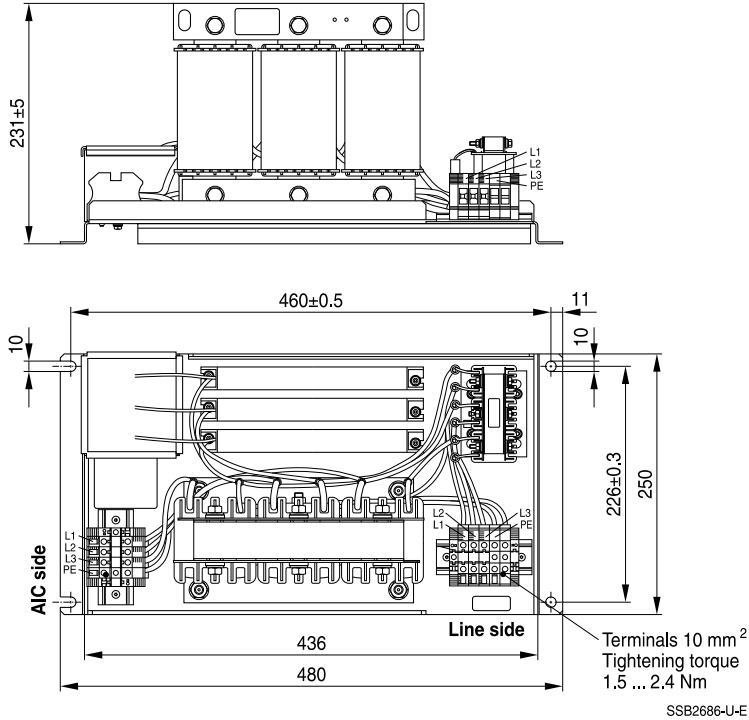**Dimensional drawings**
**B84143G0016R405 (16 A)**


General tolerances according to ISO 2768–cL  
 Dimensions in mm

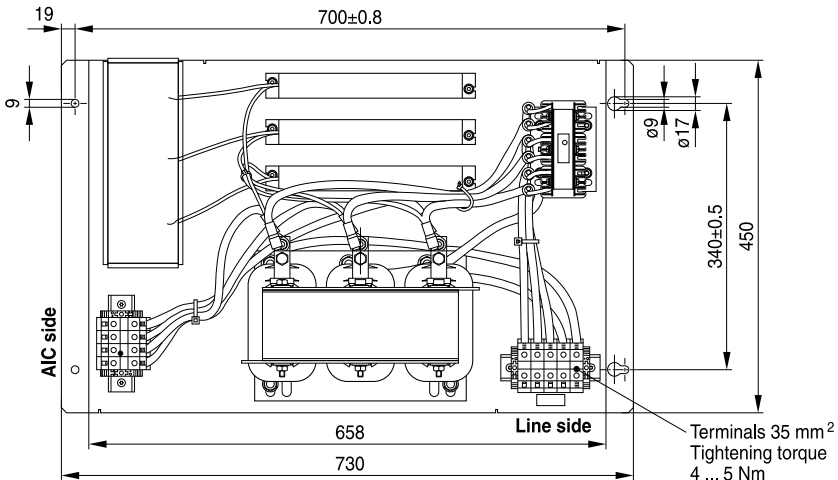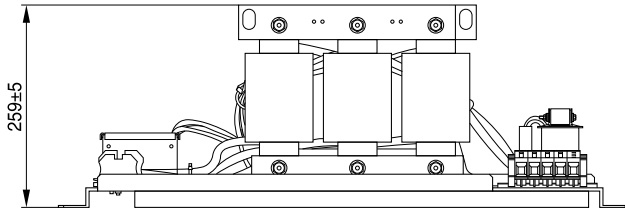
**B84143G0066R405 (66 A)**


SSB2687-3-E

General tolerances according to ISO 2768–cL  
Dimensions in mm

**B84143G0200R405 (200 A)**

Capacitor module including line reactor

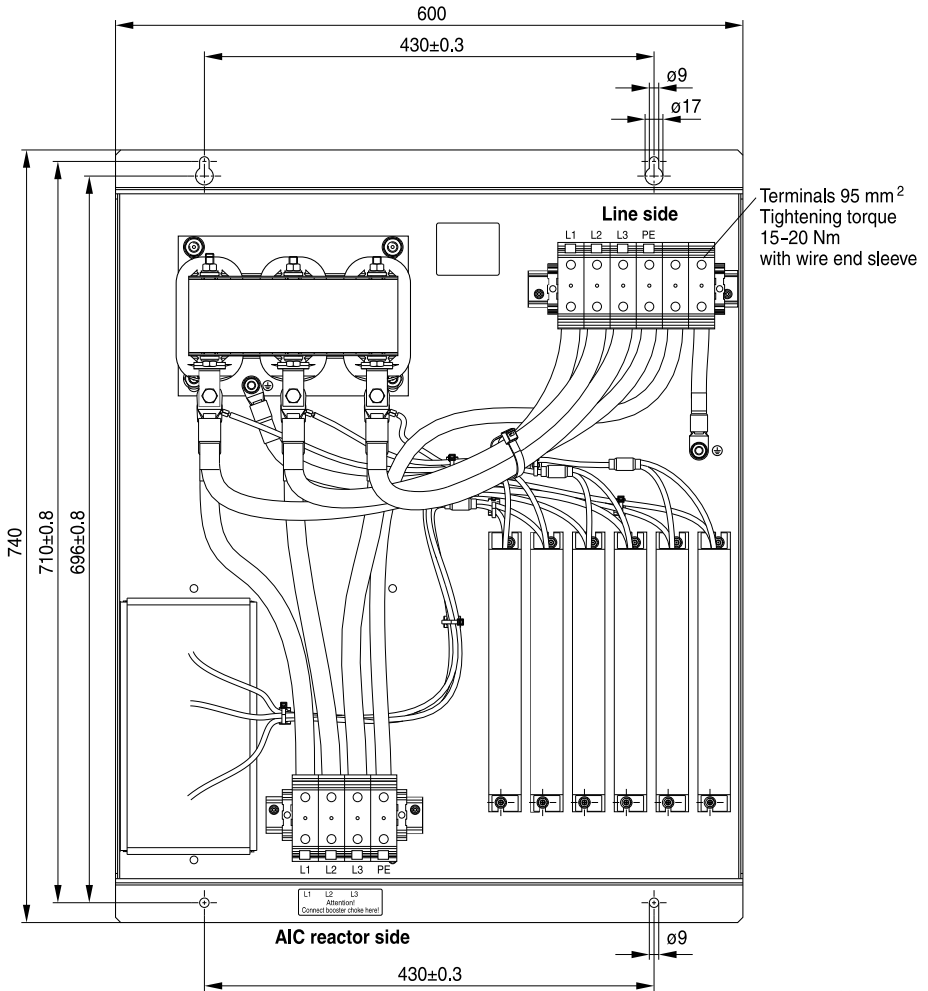


SSB2688-B-E

 General tolerances according to ISO 2768-cL  
 Dimensions in mm



**B84143G0200R405 (200 A)**

AIC reactor

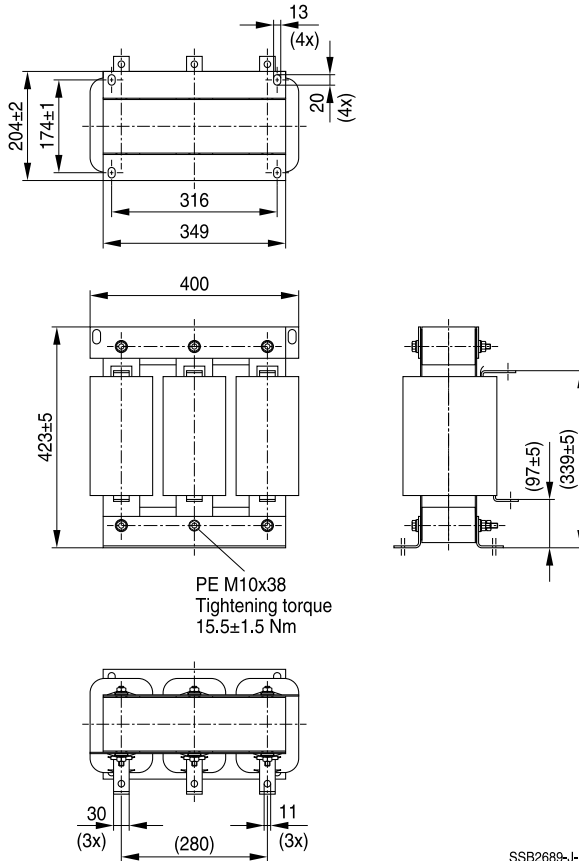


SSB2689-J-E

General tolerances according to ISO 2768–cL

Dimensions in mm

**B84143G0400S405 (400 A)**


Capacitor module

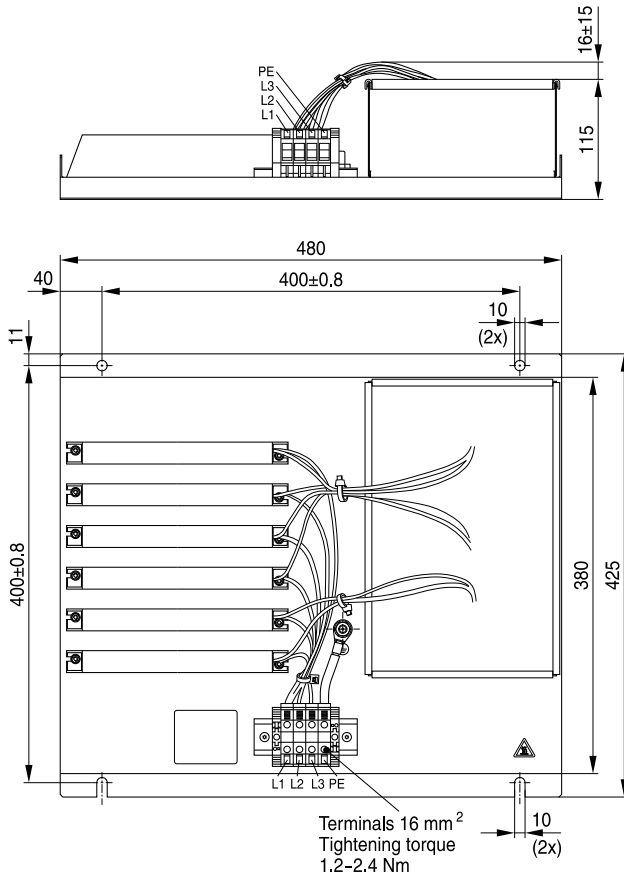

General tolerances according to ISO 2768-cL  
Dimensions in mm

**B84143G0400S405 (400 A)**

Line reactor

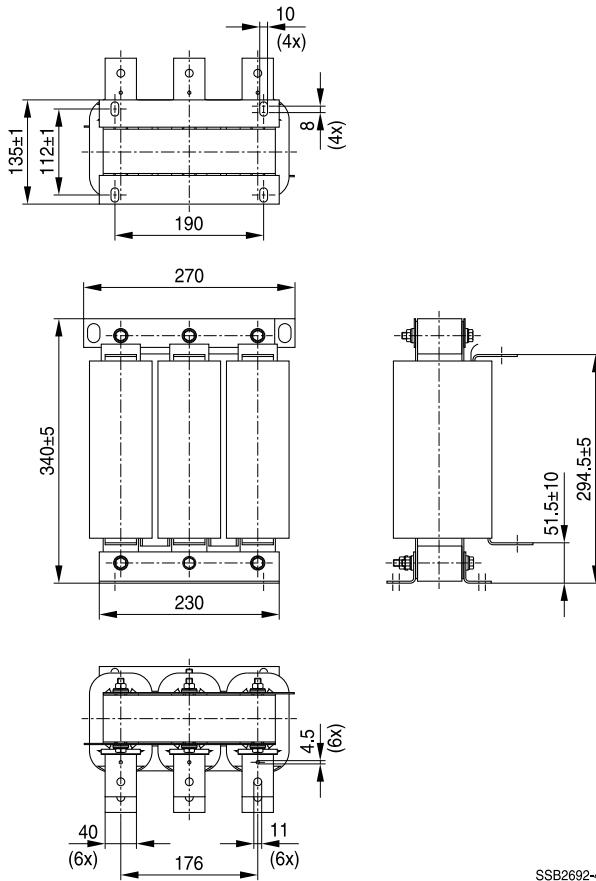


SSB2692-4

General tolerances according to ISO 2768–cL  
Dimensions in mm


**B84143G0400S405 (400 A)**

AIC reactor

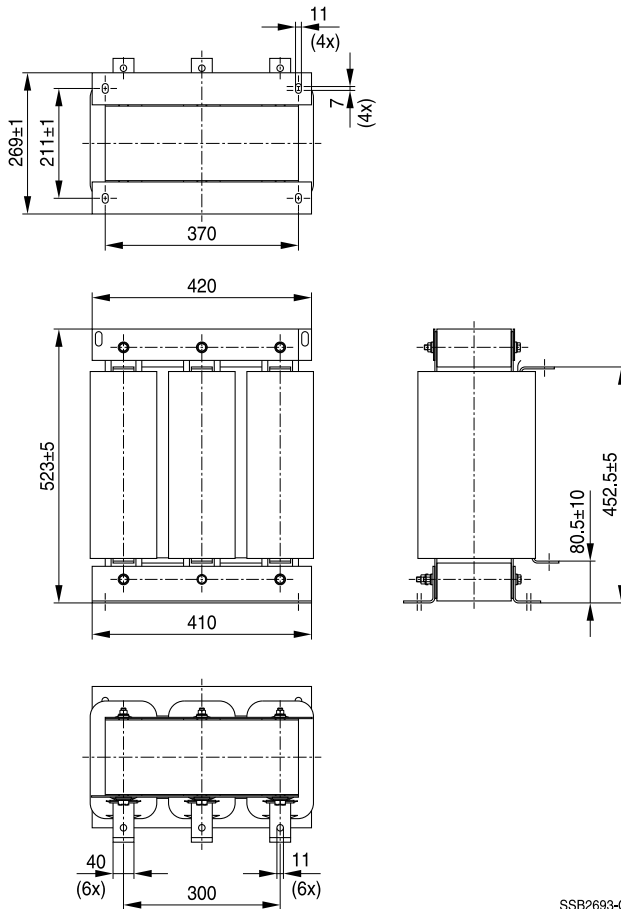


SSB2693-C


General tolerances according to ISO 2768-cL  
 Dimensions in mm

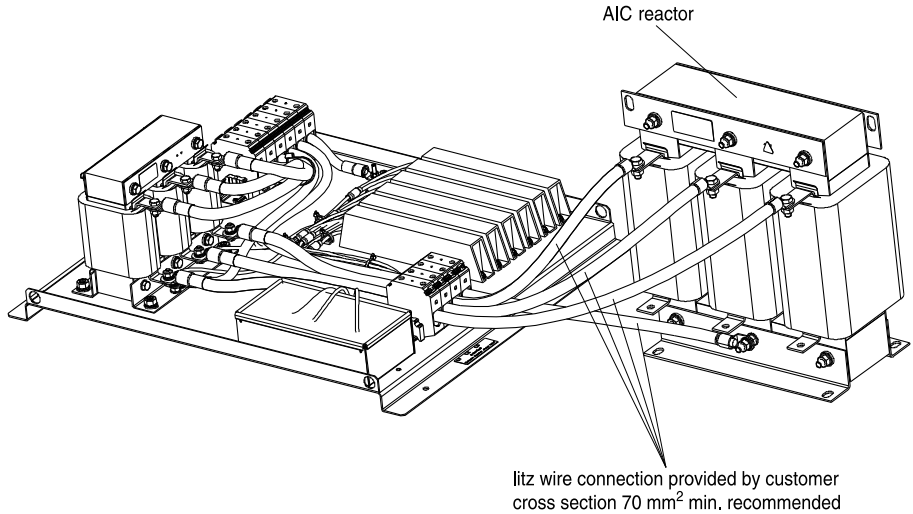**Setup recommendations**
**B84143G0200R405**


SSB2690-M-E

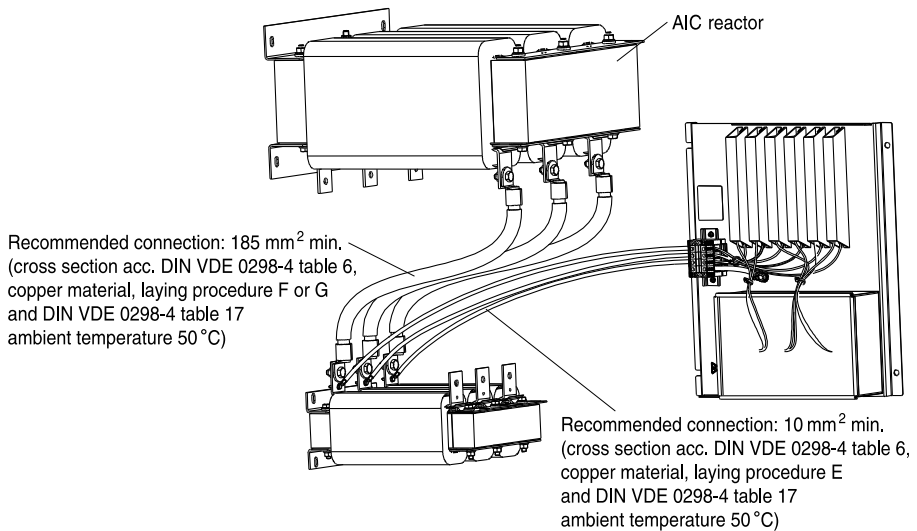**B84143G0400S405**


SSB2694-K-E

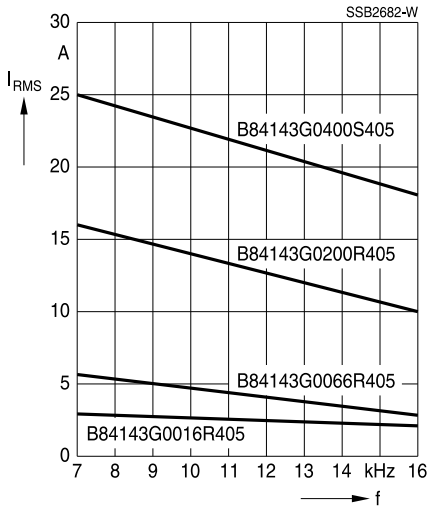**Max. allowed Harmonics  $\Sigma I_{RMS}$  vs. AIC pulse frequency (linearised)**


Max. allowed harmonics for AIC reactor L4/6 (see circuit diagram) and capacitor group

**Protective covers**
**for LCL filter series B84143G\*405**
**For filters with rated current 16 A ... 400 A**
**Construction**

- Material: Zinc plated sheet steel

**Features**

- Protection against accidental contact

**Typical applications**

- Switch cabinets where the installation in the arm's reach allows the contact with live parts


**Ordering codes for optional covers**

Ordering code	Useable for filter types <sup>1)</sup>
B84143Q0016R405	B84143G0016R405
B84143Q0066R405	B84143G0066R405
B84143Q0200R405 <sup>2)</sup>	B84143G0200R405

1) Cover for B84143G0400S405 not available

2) Cover in development; IP20 compliance only for capacitor module incl. line reactor


## Mounting

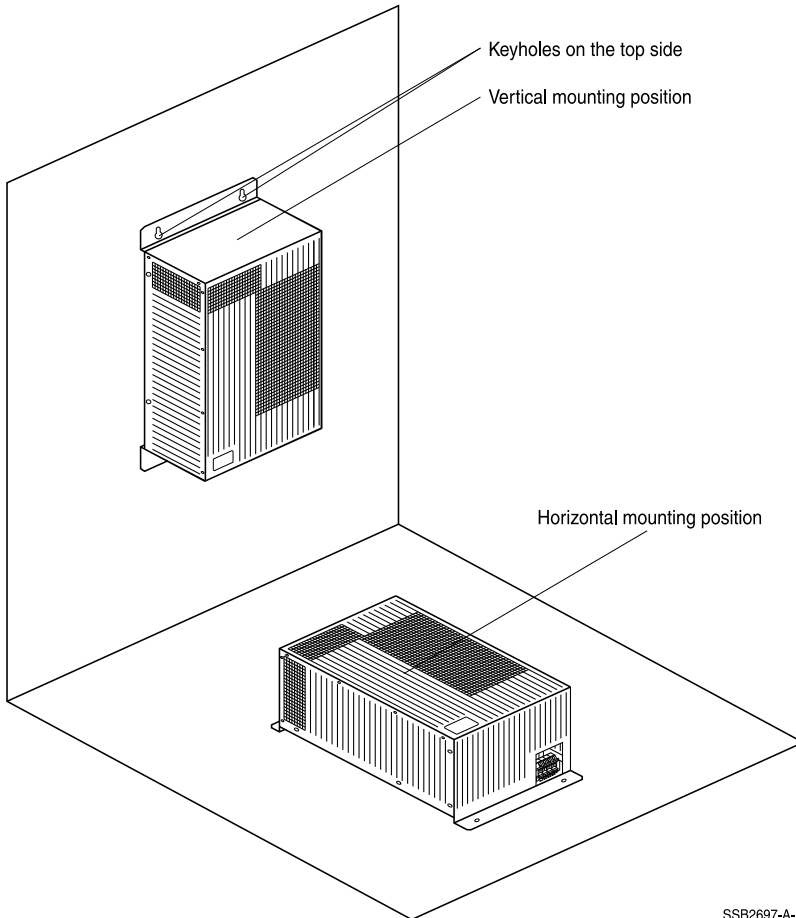


SSB2697-A-E



Convection space

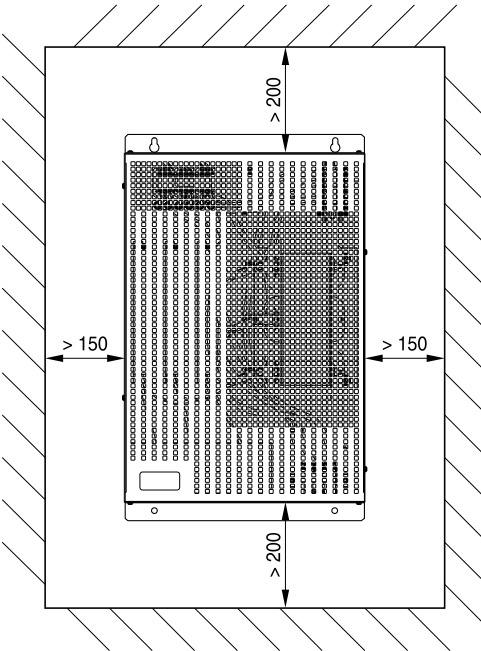


SSB2698-I

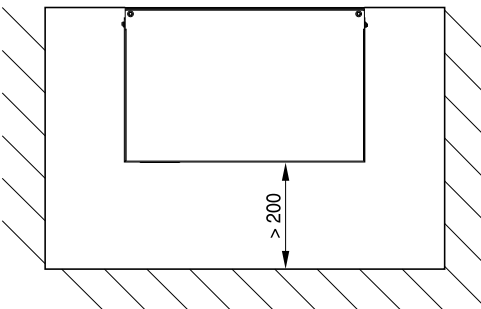

SSB2699-R

Dimensional drawings of covers


B84143Q0016R405

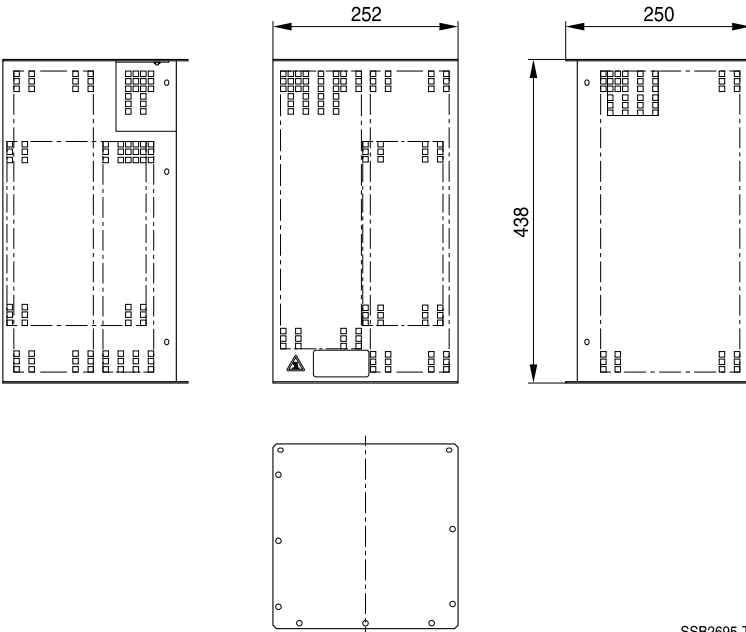

SSB2695-T

General tolerances according to ISO 2768–cL  
Dimensions in mm


**B84143Q0066R405**

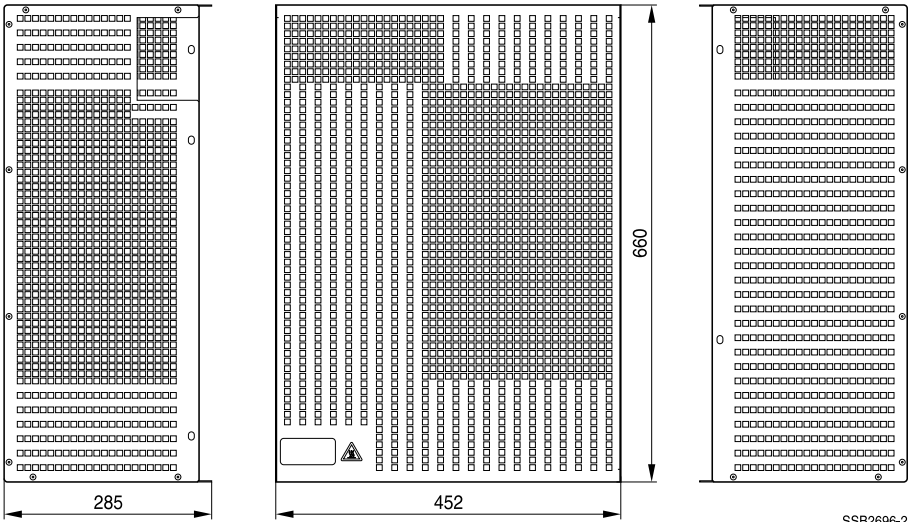

SSB2696-2

General tolerances according to ISO 2768–cL  
Dimensions in mm

## Cautions and warnings

Please read all safety and warning notes carefully before installing the EMC filter and putting it into operation (see ). The same applies to the warning signs on the filter. Please ensure that the signs are not removed nor their legibility impaired by external influences.

Death, serious bodily injury and substantial material damage to equipment may occur if the appropriate safety measures are not carried out or the warnings in the text are not observed.

## Using according to the terms

The EMC filters may be used only for their intended application within the specified values in low-voltage networks in compliance with the instructions given in the data sheets and the data book. The conditions at the place of application must comply with all specifications for the filter used.

### Warning

- It shall be ensured that only qualified persons (electricity specialists) are engaged on work such as planning, assembly, installation, operation, repair and maintenance. They must be provided with the corresponding documentation.
- Danger of electric shock. EMC filters contain components that store an electric charge. Dangerous voltages can continue to exist at the filter terminals for longer than five minutes even after the power has been switched off.
- The protective earth connections shall be the first to be made when the EMC filter is installed and the last to be disconnected. Depending on the magnitude of the leakage currents, the particular specifications for making the protective-earth connection must be observed.
- Impermissible overloading of the EMC filter or filter, such as with circuits able to cause resonances, impermissible voltages at higher frequencies etc. can lead to bodily injury and death as well as cause substantial material damages (e.g. destruction of the filter housing).
- EMC filters and filters must be protected in the application against impermissible exceeding of the rated currents by overcurrent protective circuitry.
- In case of leakage currents  $>3.5$  mA you shall mount the PE conductor stationary with the required cross section before beginning of operation and save it against disconnecting. For leakage currents  $I_L^{(1)} < 10$  mA the PE conductor must have a KU value<sup>2)</sup> of  $4.5 A^{3)}$ ; for leakage currents  $I_L \geq 10$  mA the PE conductor must have a KU value of 6.<sup>4)</sup>
- Output chokes and output filters must be protected in the application against impermissible exceeding of the component temperature.
- The converter output frequency must be within the specified range to avoid resonances and uncontrolled warming of the output chokes and output filters.

1)  $I_L$  = leakage current let-go

2) The KU value (symbol KU) is a classification parameter of safety-referred failure types designed to ensure protection against hazardous body currents and excessive heating.

3) A value of KU = 4.5 with respect to interruptions is attained with: a) a permanently connected protective earth circuit  $\geq 2.5$  mm<sup>2</sup> connected via shroud connectors (IEC 60309–2) and b) a protective earth circuit.

4) KU = 6 with respect to interruptions is achieved for fixed-connection lines  $\geq 10$  mm<sup>2</sup> where the type of connection and line layout correspond to the requirements for PEN conductors as specified in relevant standards.

The table below summarizes the safety instructions that must be observed without fail. A detailed description can be found in the relevant chapters of the databook.

Topic	Instructions	Reference chapter (data book), paragraph
Selecting a filter	When selecting a filter, it is mandatory to observe the rated data of the equipment (such as its rated input current, rated voltage, harmonic content etc.) as well as the derating instructions in Chapters 9 and 10.	Selection guide for converter filters
Rated voltage	When power distribution systems deviating from the symmetric TN-S system it is to check the suitability of the EMC filters and the allowed voltages including the fault cases.	Power distribution systems, 7
Protection from residual voltages Discharge resistors	Active parts must be discharged within 5 s to a voltage of less than 60 V (or 50 $\mu$ C). If this limit cannot be observed due to the operating mode, the hazardous point must be permanently marked in a clearly visible way.  Filters which are not permanently connected (e.g. when the test voltage is applied to the filter at the incoming goods inspection) must be discharged after the voltage has been switched off.	Safety regulations, 6.1  Safety regulations, 6.2
Installing and removing of EMC filters Installation	When installing and removing our EMC filters, a voltage-free state must be set up and secured with observance of the five safety rules described in EN 50110-1.	Safety regulations, 6.4
Use in IT systems	The special features of the IT system ("first fault case" and other fault cases) shall be observed.	Power distribution system (network types), 7.6
Safety notes on leakage currents	The filter leakage currents specified in the data book are intended for user information only. The maximum leakage current of the entire electrical equipment or appliance has to be limited for safety reasons. Please obtain the applicable limits for your application from the relevant regulations, provisions and standards.	Leakage current, 8.4 Leakage current, 8.6
Voltage derating Hazards caused by overloading the filters	If the permissible limits for the higher-frequency voltages at the filter are exceeded, the filter may be damaged or destroyed.	Voltage derating, 9.8
Current derating at elevated ambient temperatures	Non-observance of the current derating may lead to overheating and consequently represents a fire hazard.	Current derating, 10.1

Topic	Instructions	Reference chapter (data book), paragraph
Protective earth connection at operating currents >250 A	For operating currents greater than 250 A, we recommend the PE connection to be set up between the feed (filter: line) and output (filter: load) not via the PE terminal bolt in the filter housing.	Mounting instructions, point 2
Mounting position	Note the mounting position of the filters! It must always be ensured that natural convection is not impaired.	Mounting instructions, point 13
Long motor cables	Long motor cables cause parasitic currents in the installation. The cable lengths indicated for the output chokes and output filters serve for orientation. The user must check the technical parameters and especially the choke temperatures for the respective application.	Mounting instructions, point 15

### Display of ordering codes for EPCOS products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications and the website of EPCOS, or in order-related documents such as shipping notes, order confirmations and product labels. The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products. Detailed information can be found on the Internet under [www.epcos.com/orderingcodes](http://www.epcos.com/orderingcodes)

**Symbols and terms**

Symbol	English	German
$\alpha$	Insertion loss	Einfügungs­dämpfung
$C_R$	Rated capacitance	Bemessungs­kapazität
$C_X$	Capacitance X capacitor	Kapazität X-Kondensator
$C_Y$	Capacitance Y capacitor	Kapazität Y-Kondensator
$\Delta V$	Voltage drop (input to output)	Spannungsabfall im Filter
$dv/dt$	Rate of voltage rise	Spannungsan­stiegsgeschwindigkeit
$f$	Frequency	Frequenz
$f_M$	Converter output frequency	Motorfrequenz
$f_P$	Pulse frequency	Pulsfrequenz
$f_R$	Rated frequency	Bemessungs­frequenz
$f_{res}$	Resonant frequency	Resonanz­frequenz
$I_C$	Current through capacitor	Strom durch Kondensator
$I_{LK}$	Filter leakage current	Filter-Ableit­strom
$I_{max}$	Maximum current	Maximal­strom
$I_N$	Nominal current	Nenn­strom
$I_{op}$	Operating current (design current)	Betriebs­strom
$I_{pk}$	Rated peak withstand current	Bemessungs-Stoß­stromfestigkeit
$I_q$	Capacitive reactive current	Kapazitiver Blind­strom
$I_R$	Rated current	Bemessungs­strom
$I_S$	Interference current	Stör­strom
$L$	Inductance	Induktivität
$L_R$	Rated inductance	Bemessungs­induktivität
$L_{stray}$	Stray inductance	Streu­induktivität
$P_L$	Power loss	Verlust­leistung
$R$	Resistance	Wider­stand
$R_{is}$	Insulation resistance	Isolations­wider­stand
$R_{typ}$	DC resistance, typical value	Gleich­strom­wider­stand, Richtwert
$T_A$	Ambient temperature	Umgebung­temperatur
$T_{max}$	Upper category temperature	Obere Kategorietemperatur
$T_{min}$	Lower category temperature	Untere Kategorietemperatur
$T_R$	Rated temperature	Bemessungs­temperatur
$u_k$	Referred voltage drop in %	Bezogener Spannungsabfall in %
$V_{eff}$	RMS voltage	Effektiv­spannung
$V_K$	Voltage drop	Spannungsabfall
$V_{LE}$	Voltage line to earth; voltage line to ground	Spannung Phase zu Erdpotential
$V_N$	Nominal voltage	Nenn­spannung
$V_R$	Rated voltage	Bemessungs­spannung
$V_{peak}$	Peak voltage	Spitzen­spannung
$V_{test}$	Test voltage	Prüf­spannung
$V_X$	Voltage over X capacitor	Spannung über X-Kondensator
$V_Y$	Voltage over Y capacitor	Spannung über Y-Kondensator
$X_L$	Inductive reactance	Induktiver Blind­wider­stand
$Z$	Impedance	Schein­wider­stand
$ Z $	Impedance, absolute value	Schein­wider­stand (Betragswert)

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.tdk-electronics.tdk.com/material](http://www.tdk-electronics.tdk.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.  
  
We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.
8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.tdk-electronics.tdk.com/trademarks](http://www.tdk-electronics.tdk.com/trademarks).